


# WHITELION- IR REMOTE

## 1) REMOTE FUNCTIONS:

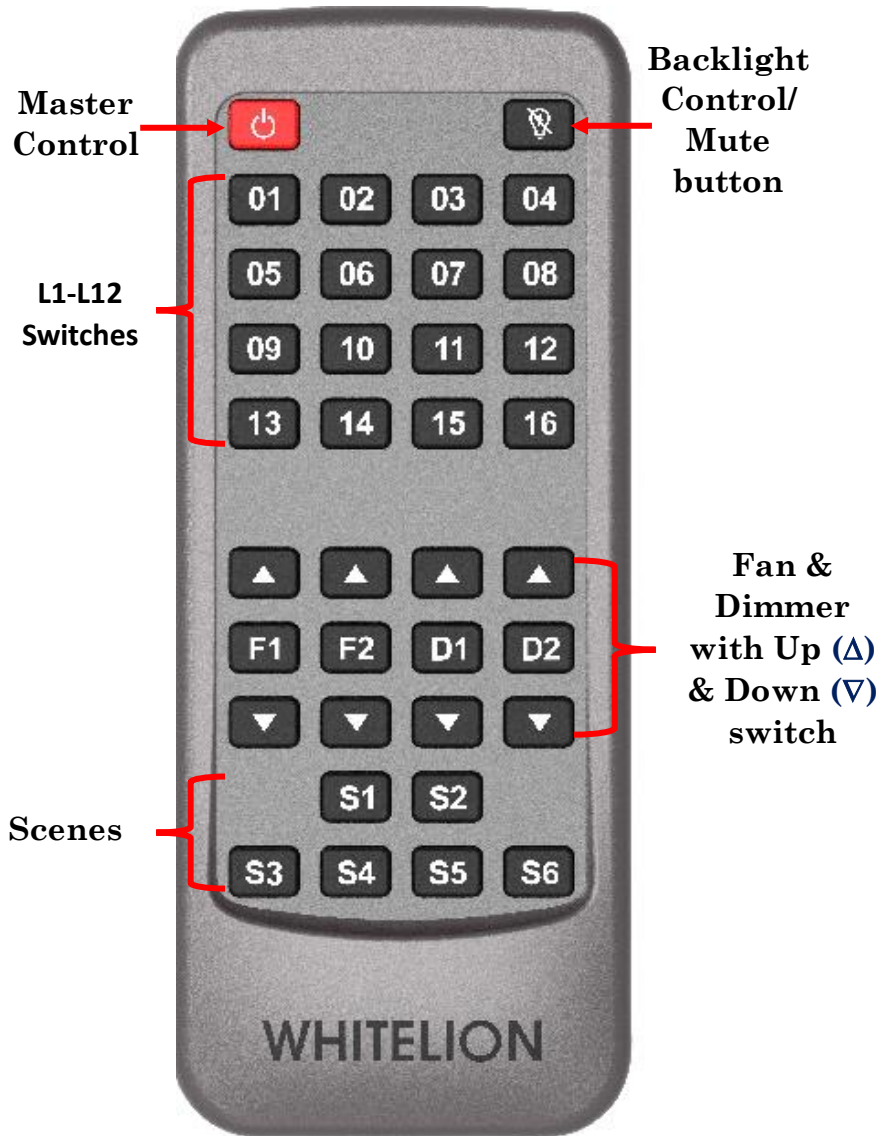

## 2) SWITCHING OPERATIONS:

- Touch Locked: This feature use for secure your appliances from child to operate.
- Memory Recall: If power goes OFF by default switches will retain its previous state when power returns. It is also possible to turn off this feature.

FUNCTION	PANEL OPERATION	DEVICE OBSERVATION
Assign Switch	Select & hold touch switch > Master button starts blinking > press any switch L1-L12 from remote (Once at a time)	Switch should toggle its state. (ON > OFF or OFF > ON)
Removed OR Mute Switch	Select and hold touch switch > master button starts blinking> press backlight control from remote	Switch removed from remote but you can operate via touch
Scenes Assign	Select touch switches & its state, hold master button > it starts blinking > press switches S1-S6 from remote (Once at a time)	Assigned switches will reflect
Scenes unassigned OR removed	Operate assign scenes, hold master control > it starts blinking > press assigned scene switch from remote (Once at a time)	All switches must turn to OFF
Locked switch	Select touch switch and its state, hold switch > master button starts blinking > press master control from remote (Once at a time)	Locked switch neither operate from remote nor touch
Unlock switch	Hold locked switch > master button starts blinking > press master control from remote OR Power outlet on/off	Switch must be toggle
Memory Recall On	Hold master button > it starts blinks > press master control from remote	If there is any switch it should toggle
Memory Recall OFF	Hold master button > it starts blinks > press master control from remote	If there is any switch it should toggle

### • KEY FEATURES:

- Models like 2M, 2C & 2S has master button at centre of touch display.
- 2I, 2B & 2A has master button at upside of touch display.
- Scenes and memory recall functionality not applicable for 2C, 2S models. It is OFF and it won't be changed.
- By default, memory recall is ON.
- With backlight control, you can enable/disable white light of touch display.
- Locked switch cannot operate from touch display and remote but it is possible via WHITELION application.
- While assigning fan/dimmer you have to assigned its up and down switch too.
- Do not assign scenes when your switch is locked.
- Locked switch remains locked irrespective of scenes.

- **TECHNICAL SPECIFICATIONS:**

- Transmission angle: 120°
- Range: Up to 10m Line of sight
- Power supply: 3V Battery – CR2032
- Operating Frequency: 38kHz
- Dimensions: 132×15×53 mm

### 3) REMOTE CELL

- Put cell in tray as shown in picture or else remote won't work.

